



(11) **EP 1 649 770 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
07.04.2010 Bulletin 2010/14

(21) Application number: **04747479.6**

(22) Date of filing: **14.07.2004**

(51) Int Cl.:

A42B 3/28 (2006.01)

(86) International application number:

PCT/JP2004/010013

(87) International publication number:

WO 2005/006901 (27.01.2005 Gazette 2005/04)

(54) **PROTECTIVE CAP**

SCHUTZKAPPE

CASQUETTE PROTECTRICE

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **18.07.2003 JP 2003276380**

(43) Date of publication of application:
26.04.2006 Bulletin 2006/17

(73) Proprietor: **Builmatel Co., Ltd.**
Tokyo 103-0025 (JP)

(72) Inventors:
• **SHIRAI, Syoji., c/o BUILMATEL Co., Ltd.,**
Chuou-ku, Tokyo 1030025 (JP)
• **TANIZAWA, Kazuhiko,**
ATOM Co., Ltd.
Tokyo 1040041 (JP)

(74) Representative: **Hoffmann, Klaus**
Hoffmann - Eitle
Patent- und Rechtsanwälte
Arabellastrasse 4
D-81925 München (DE)

(56) References cited:

DE-U- 8 426 051	GB-A- 2 307 842
JP-A- 10 195 708	JP-A- 10 331 021
JP-A- 2001 003 220	JP-U- 2 061 931
JP-U- 59 113 325	JP-U- 63 089 924
JP-U- 63 175 125	US-A- 4 550 445
US-A- 5 829 065	

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 649 770 B1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a structure of a safety hat worn for protection of one's head during various works including construction and civil engineering.

BACKGROUND TECHNOLOGY

[0002] In sites and factories of various works, a worker avoids dangers from a flying object or a falling object as well as danger of falling by wearing a safety hat before such a danger happens, but the safety hat steams the worker's head with sweat by wearing the safety hat for a long time during summer time or hard work with a large quantity of labor. The steamed condition not only makes the works painful but also lowers the working efficiency.

[0003] As an attempt to provide the safety hat with air permeability, there has been known a safety hat formed by mesh or mesh porous materials so that absent areas are alternately positioned (see JP 60-143736U). There have been other attempts to provide a working helmet or a riding helmet with air permeability by using air ventilation equipment (see JP 58-7832U and JP 1-94430U). However, these safety hats do not have any protection from rain for outdoor use.

Although there has been disclosed a helmet having air permeability and protection from rain at the same time (see JP 42-20108U), it is hard to achieve the original purpose of a helmet to protect a human head since there is possibility of a flying or falling object entering into the helmet and the helmet may not be strong enough due to fine pores provided in the side portions of the helmet body. The helmet does not have sufficient protection from rain because rain water may enter into the helmet when a worker bends himself to work.

[0004] Inventors of the present invention have suggested a safety hat including a double-structured hat body as a safety hat with air permeability and protection from rain (see WO 95/28101), but the double structure forces the safety hat to increase weight. Next, the inventors suggested a safety hat comprising a hat body having air conduit pores penetrating internal and external walls thereof, a drainage passage provided along the internal wall of the hat body to discharge water coming into the hat body through the air conduit pores, and air vent pores formed on the upper side of the drainage passage in the cross-section perpendicular to the water draining direction (see WO 98/23176). The safety hat was light in weight and excellent in terms of the rain protection, but there was still a room for improvement in terms of air permeability. The inventors then suggested a safety hat having a flow channel formed in the right and left side walls of the hat body, flowing ambient air in longitudinal directions and having a weathering structure, and the flow channel being connected to the internal of the hat body at the top portion of the hat body (see JP

2000-303246), but the problem of the safety hat is also how to reduce the weight.

[0005] JP 2001-003220 discloses a safety hat according to the preamble of claim 1.

SUMMARY OF THE INVENTION

[Problems to be solved by the invention]

[0006] The present invention is intended for providing a safety hat with overwhelming light weight and marvelous air permeability as well as measures for water protection against rainy weather and the like.

[Means of solving problem]

[0007] The safety hat according to the present invention includes the features of claim 1.

[0008] Preferred optional features are recited in the dependent claims.

[Effects of the invention]

[0009] The safety hat according to the present invention achieves overwhelming light-weight and marvelous air permeability as well as measures for water protection against rainy weather and the like by introducing a large amount of ambient air into the hat body along the visor portion defined by a streamlined curvature.

In addition to the effects described above, the other safety hat with the inner plate lined inside the peak portion of the hat body facilitates the molding process thereof. Further, air permeability can be also dramatically improved by providing the air vent pores at the peak portion of the hat body.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010]

FIG. 1 is; a perspective view showing the hat body from the diagonally upper front.

FIG. 2 is; a longitudinal side view showing the center portion of the hat body.

FIG. 3 is; a rear view of the hat body.

FIG. 4 is; a perspective view showing an example of the modified hat body.

FIG. 5 indicates; a longitudinal side view showing another example of the modified hat body and a flat view of the inner plate.

FIG. 6 indicates; a longitudinal side view showing another example of the modified hat body and a flat view of the inner plate.

[Explanations of letters or numerals]

[0011]

- 10. Hat body
- 12. Visor portion
- 12a. Top end of the visor portion
- 13, 17. Air hole
- 15, 19. Eave portion
- 18. Back portion of the head
- 18a. Top end of the back portion of the head
- 20. Inner plate
- 21. Opening
- 22. Weir
- 25. Air passage
- 27. Air vent pore

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0012] The most preferred embodiment of the safety hat according to the present invention is described below with reference to the drawings.

FIG. 1 is a perspective view of the hat body 10 forming the main body of the safety hat as viewed from the upper front thereof, which is generally provided therein with a shock-absorbing liner for absorbing shock applied to the hat body 10, a wearing body (configured with a hammock, a head band, a loop and the like) for retaining the safety hat on the workers head and making it easy to wear the safety hat, and a chin strap for preventing the safety hat from dropping.

The hat body 10 may be made of synthetic resin such as polyester, polypropylene, polyethylene, polycarbonate, and ABS resin. When strength is required, the hat body may also be made of iron, steel, aluminum, aluminum base alloy, and other high-strength alloys, and fiber-reinforced plastic and ceramic may be also used depending on the application of the safety hat.

[0013] The visor portion 12 in front of the hat body 10 is provided with the front air hole 13 in the horizontal direction. The horizontal length of the front air hole 13 is preferably equivalent to or larger than the radius of the hat body 10. The number of the front air hole 13 is not necessarily one, but when there are more than one, the total length of the plurality of the front air hole 13 is preferably equivalent to or larger than the radius of the hat body 10. The upper limit of the horizontal length should be approximately the diameter of the hat body 10. The visor portion 12 is defined by the streamlined curvature so that the ambient air can be brought in smoothly, and the eave portion 15 of the hat body 10 covers the top end 12a of the visor portion 12 from the outside without contacting the same to form the front air hole 13.

[0014] FIG. 2 is a longitudinal side view showing the center portion of the hat body 10, where the top end 12a of the visor portion 12 and the lower end of the front eave portion 15 play the role of a shielding mechanism against annealing wire and any other falling objects and flying objects that may enter the hat body 10 from outside since the top end 12a of the visor portion 12 and the lower end of the front eave portion 15 are overlapped in the hori-

zontal direction. In order to have high air permeability, the distance between the top end 12a of the visor portion 12 and the lower end of the front eave portion 15 should preferably be long as much as possible on the condition that the shielding effect against foreign objects and weathering structure are satisfied.

[0015] The air hole 17 is also provided at the opposing position to the visor portion 12 of the hat body 10, which is located at the back of the peak portion of the hat body 10 in this embodiment. The rear air hole 17 is preferably located at a position opposing to the visor portion 12, especially at the back of the peak portion of the hat body 10, since the rear air hole 17 is required to function as an outlet for the air introduced into and staying inside the hat body 10 while the front air hole 13 mainly functions as an inlet for the ambient air.

[0016] In this embodiment, the rear air hole 17 is also formed by the back portion of the head 18 of the hat body 10 defined by the streamlined curvature and the rear eave portion 19 of the hat body 10 covering the top end 18a of the back of the head from the outside without contacting the same, like the front air hole 13, resulting to have the shielding mechanism against foreign objects and weathering structure. The safety hat according to the present invention is not limited to have this configuration as long as the rear air hole 17 is equipped with the shielding mechanism against foreign objects and weathering structure.

[0017] FIG. 3 is a rear view of the hat body 10 showing the rear air hole 17 as described above.

According to the present invention, since the front air hole 13 and the rear air hole 17 are open to the ambient air, the ambient air flows through the hat body 10. Especially, since a large amount of ambient air introduced into the hat body along the visor portion 12 defined by the streamlined curvature is directed to the rear air hole 17 along the internal wall of the hat body to flow without dispersion, wet air tending to stay in the hat body 10 consequently follows the flow of the ambient air to be discharged out of the hat body in an instant. The structure of the safety hat according to the present invention allows a large amount of ambient air flowing from the front air hole 13 to directly contact the forehead which is the most sensitive part to cold air on the head of the wearer of the safety hat, and therefore achieves an excellent cooling effect in somesthetic terms.

[0018] FIG. 4 is a perspective view showing an example of the modified hat body. An embodiment of the safety hat having the front air hole 13 with the horizontal length slightly shorter than the radius of the hat body is shown on the left side, and another embodiment of the safety hat having the short visor portion 12 on the right side.

[0019] The hat body 10 in the present invention can be formed by mold tooling, and in the case it is difficult to form an entire body in one time molding, the body can be separated into a plurality of components for molding. For instance, if it is difficult to form the rear air hole 17 at a time, a hat body 10 may be as shown in FIG. 5.

According to the embodiment of the hat body 10 shown in the longitudinal side view in FIG. 5, the inner plate 20 is lined inside the peak portion of the hat body 10. The inner plate 20 is, as shown in the flat view above the hat body 10, a thin strip extending in the longitudinal direction of the hat body and provided with a large opening 21 at the center thereof. The air passage 25 formed between the peak portion of the hat body 10 and the inner plate 20 in this way and the internal of the hat body 10 are in communication with each other by the opening 21, and the air passage 25 is in communication with the rear air hole 17 at the same time.

[0020] While the inner plate 20 has an effect of reinforcing the peak portion of the hat body 10 requiring the strength most, the inner plate 20 is desired to be a small strip as light as possible.

As described above, it is important for the rear air hole 17 to have the shielding mechanism against the foreign object and a weathering structure. With this embodiment, the shielding mechanism against foreign objects is formed by establishing the weir 22 around the periphery of the opening 21 at the inner plate 20. It is necessary that the opening 21 is positioned closer to the internal surface of the hat body than the periphery thereof, and that the opening 21 is located at a higher position, for instance, by forming bumps on the surface of the inner plate 20.

[0021] With this embodiment, in order to improve air permeability, there are provided a plurality of air vent pores 27, 27 ... penetrating the internal and external surfaces of the hat body 10 at the peak portion thereof. The air vent pores 27, 27 ... are, as indicated by the dotted line in the flat view of the inner plate 20, provided at a position opposing to the inner plate 20 and not overlapping the opening 21. Both items are arranged so as not to overlap for the purpose of shielding from foreign objects and protection from water such as rain water, as described above.

[0022] The size of the air vent pores 27, 27 ... is not specifically limited but may be any size capable of retaining sufficient strength of the hat body 10. The number of the air vent pores 27, 27 ... is preferably between several and ten or more around the opening 21 opposing to the inner plate 20. The undermost air vent pores 27 also functions as a drainage passage. The shape of the air vent pores 27, 27 ... is not limited to the circle as shown in the drawing.

The embodiment shown in FIG. 5 achieves marvelous air permeability by the functions of the front and rear air holes 13, 17 and the air vent pores 27, 27 For the materials identical to the materials in the embodiment shown with reference to FIGS. 1 to 3, the same numerals are applied and the explanations are omitted.

[0023] The embodiment of the hat body 10 shown with reference to the longitudinal side view in FIG. 6 is an example of the modification from the embodiment shown in FIG. 5, where the visor portion 12 is configured as a part of the inner plate 20 by connecting the front tip of

the strip-shaped inner plate 20 to the top end 12a of the visor portion. This embodiment allows the air passage 25 to be in direct communication with the air hole 13 in the visor portion 12 so that an even stronger flow of ambient air is formed along the internal wall of the hat body. With this embodiment, the visor portion 12 is not limited to be defined by the streamlined curvature but may be defined by a flat surface since the ambient air can be brought in smoothly through the air hole 13 in the visor portion 12.

[0024] With this embodiment, rain water entered from the air passage 25 is discharged from the air holes 13, 17. The number of the opening 21 is not limited to one but there may be a plurality of the opening 21. For the materials shown in FIG. 6 identical to the materials in the embodiment shown with reference to FIG. 5, the same numerals are applied and the explanations are omitted.

[0025] A penetration tolerance test (articles 6 and 7) and a shock absorption test (article 8) were performed on all of the described safety hats based on the standard specified by Minister of Labor (Announcement No. 39 by Ministry of Labor, June 5th, 1991), and the performance specified by each article was confirmed.

[Industrial applicability]

[0026] The safety hat according to the present invention may be used for various works such as construction, civil engineering, operation of heavy equipment, steering a working vehicle, a marine vessel and an aircraft, duties of security, police and fire-fighting inside and outside a building. The safety hat may also be widely used in a construction site of a building or a dam, a work site of a road or a tunnel, a dockyard, an ironworks, an iron factory, a quarry, and other various work sites and factories.

Claims

1. A safety hat comprising a hat body (10) and a visor portion (12) in front of the hat body (10), wherein a front eave portion (15) of the hat body (10) covers a top end (12a) of the visor portion (12) from the outside without contacting the same, so as to form a front air hole (13), and wherein a rear eave portion (19) of the hat body (10) covers a top end (18a) of a rear portion (18) of the hat body (10) without contacting the same, so as to form a rear air hole (17),
characterized in that
the visor portion (12) as well as an internal wall of the hat body (10) are defined by a streamlined curvature so that air can smoothly flow into the safety hat through the front air hole (13), along the internal wall of the hat body (10) and out of the rear air hole (17) without dispersion, and
the top end (12a) of the visor portion (12) is located vertically above the lower end of the front eave por-

- tion (15).
2. The safety hat according to claim 1, wherein a shielding mechanism against foreign objects and a weathering structure is disposed at the front air hole (13) and/or the rear air hole (17). 5
 3. The safety hat according to claim 1 or 2, wherein the rear air hole (17) is located at a position opposite to the visor portion (12) at the back of the hat body (10). 10
 4. The safety hat according to any one of claims 1 to 3, wherein the front air hole (13) is in the horizontal direction. 15
 5. The safety hat according to any one of claims 1 to 4, wherein an inner plate (20) with an opening (21) at the center is lined at a peak portion of the hat body (10), and an air passage (25) formed between the peak portion and the inner plate (20) is in communication with the rear air hole (17). 20
 6. The safety hat according to claim 5, wherein a front end of the inner plate (20) is connected to the top end (12a) of the visor portion (12), and the air passage (25) is in communication with the front air hole (13). 25
 7. The safety hat according to claim 5 or 6, wherein the opening (21) of the inner plate (20) is located closer to an inside of the hat body (10) than to a periphery thereof, and a plurality of vent pores (27) opposite to the inner plate (20) at the peak portion of the hat body (10) and penetrating internal and external surfaces of the hat body (10) are disposed at positions not overlapping the opening (21). 30
 8. The safety hat according to any one of claims 5 to 7, wherein the inner plate (20) has a weir (22) established at a periphery of its opening (21). 35

Patentansprüche

1. Sicherheitshelm, umfassend einen Helmkörper (10) und einen Visierabschnitt (12) vor dem Helmkörper (10), wobei ein vorderer Traufenabschnitt (15) des Helmkörpers (10) ein oberes Ende (12a) des Visierabschnittes (12) von Außen ohne dasselbige zu berühren bedeckt, um ein vorderes Luftloch (13) auszubilden, und wobei ein hinterer Traufenabschnitt (19) des Helmkörpers (10) ein oberes Ende (18a) eines hinteren Abschnittes (18) des Helmkörpers (10) ohne denselbigen zu berühren bedeckt, um ein hinteres Luftloch (17) auszubilden, **dadurch gekennzeichnet, dass** 45

der Visierabschnitt (12) sowie eine Innenwand des Helmkörpers (10) durch eine stromlinienförmige Krümmung festgelegt sind, so dass Luft problemlos in den Sicherheitshelm durch das vordere Luftloch (13) entlang der Innenwand des Helmkörpers (10) und aus dem hinteren Luftloch (17) ohne sich zu zerstreuen fließen kann, und das obere Ende (12a) des Visierabschnittes (12) vertikal über dem unteren Ende des vorderen Traufenabschnittes (15) angeordnet ist. 50

2. Sicherheitshelm nach Anspruch 1, bei dem ein Schirmmechanismus gegen fremde Objekte und eine Wetterschutzanordnung an dem vorderen Luftloch (13) und/oder an dem hinteren Luftloch (17) angeordnet sind. 55
3. Sicherheitshelm nach Anspruch 1 oder 2, bei dem das hintere Luftloch (17) an einer Position gegenüber dem Visierabschnitt (12) am Rücken des Helmkörpers (10) angeordnet ist. 60
4. Sicherheitshelm nach einem der Ansprüche 1 bis 3, bei dem das vordere Luftloch (13) sich in der Horizontalrichtung erstreckt. 65
5. Sicherheitshelm nach einem der Ansprüche 1 bis 4, bei dem eine innere Platte (20) mit einer Öffnung (21) im Zentrum mit einem Spitzenabschnitt des Helmkörpers (10) fluchtet und ein Luftdurchgang (25), der zwischen dem Spitzenabschnitt und der inneren Platte (20) ausgebildet ist, in Verbindung mit dem hinteren Luftloch (17) steht. 70
6. Sicherheitshelm nach Anspruch 5, bei dem ein vorderes Ende der inneren Platte (20) mit dem oberen Ende (12a) des Visierabschnittes (12) verbunden ist und der Luftdurchgang (25) in Verbindung mit dem vorderen Luftloch (13) steht. 75
7. Sicherheitshelm nach Anspruch 5 oder 6, bei dem die Öffnung (21) der inneren Platte (20) näher an der Innenseite des Helmkörpers (10) als an der Umgebung davon angeordnet ist, und eine Vielzahl an Lüftungsporen (27) gegenüber der inneren Platte (20) an dem Spitzenabschnitt des Helmkörpers (10) und vordringend in interne und externe Oberflächen des Helmkörpers an Positionen, die die Öffnung (21) nicht überlappen, angeordnet sind. 80
8. Sicherheitshelm nach einem der Ansprüche 5 bis 7, bei dem die innere Platte (20) ein Wehr (22) aufweist, das an einer Umgebung ihrer Öffnung (21) ausgebildet ist. 85

Revendications

1. Casque de sécurité comprenant un corps de casque (10) et une partie formant visière (12) devant le corps de casque (10), dans lequel une partie formant débord avant (15) du corps de casque (10) couvre une extrémité supérieure (12a) de la partie formant visière (12) à partir de l'extérieur sans entrer en contact avec cette dernière, de façon à former un trou d'aération avant (13), et dans lequel une partie formant débord arrière (19) du corps de casque (10) couvre une extrémité supérieure (18a) d'une partie arrière (18) du corps de casque (10) sans entrer en contact avec celle-ci, de façon à former un trou d'aération arrière (17), **caractérisé en ce que** la partie formant visière (12) aussi bien qu'une paroi interne du corps de casque (10) sont définies par une courbure aérodynamique de sorte que de l'air peut s'écouler sans à-coup dans le casque de sécurité à travers le trou d'aération avant (13), le long de la paroi interne du corps de casque (10) et hors du trou d'aération arrière (17) sans dispersion, et l'extrémité supérieure (12a) de la partie formant visière (12) est située verticalement au-dessus de l'extrémité inférieure de la partie formant débord avant (15).
2. Casque de sécurité selon la revendication 1, dans lequel un mécanisme de protection contre des objets étrangers et une structure d'exposition aux intempéries sont disposés au niveau du trou d'aération avant (13) et/ou du trou d'aération arrière (17).
3. Casque de sécurité selon la revendication 1 ou 2, dans lequel le trou d'aération arrière (17) est situé à une position opposée à la partie formant visière (12) au niveau de l'arrière du corps de casque (10).
4. Casque de sécurité selon l'une quelconque des revendications 1 à 3, dans lequel le trou d'aération avant (13) est dans la direction horizontale.
5. Casque de sécurité selon l'une quelconque des revendications 1 à 4, dans lequel une plaque intérieure (20) avec une ouverture (21) au centre est alignée au niveau d'une partie formant crête du corps de casque (10), et un passage d'air (25) formé entre la partie formant crête et la plaque intérieure (20) est en communication avec le trou d'aération arrière (17).
6. Casque de sécurité selon la revendication 5, dans lequel une extrémité avant de la plaque intérieure (20) est reliée à l'extrémité supérieure (12a) de la partie formant visière (12), et le passage d'air (25) est en communication avec le trou d'aération avant
- (13).
7. Casque de sécurité selon la revendication 5 ou 6, dans lequel l'ouverture (21) de la plaque intérieure (20) est située plus proche d'un intérieur du corps de casque (10) que d'une périphérie de ce dernier, et une pluralité de pores formant événements (27) opposés à la plaque intérieure (20) au niveau de la partie formant crête du corps de casque (10) et pénétrant dans les surfaces internes et externes du corps de casque (10) sont disposés à des positions ne chevauchant pas l'ouverture (21).
8. Casque de sécurité selon l'une quelconque des revendications 5 à 7, dans lequel la plaque intérieure (20) a une surélévation (22) établie au niveau d'une périphérie de son ouverture (21).

Fig. 1.

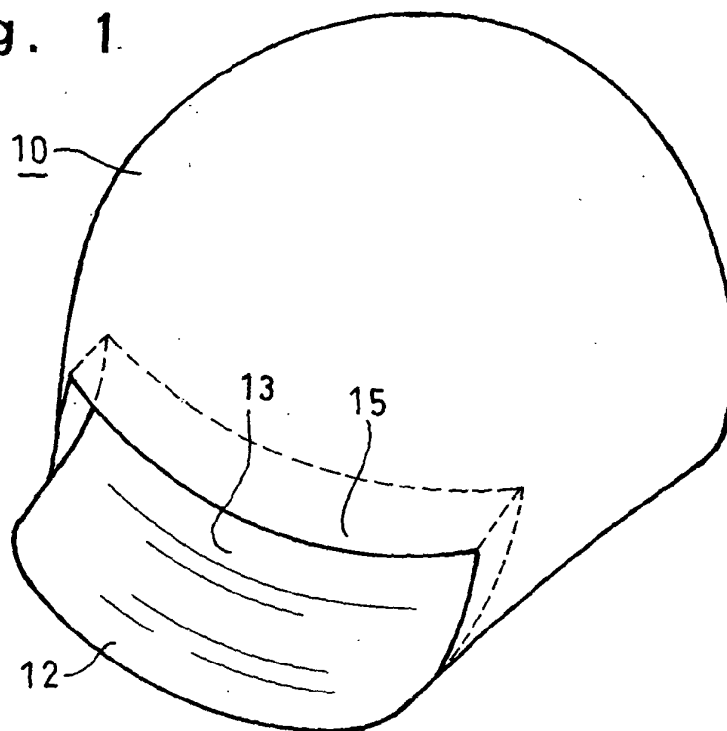


Fig. 2

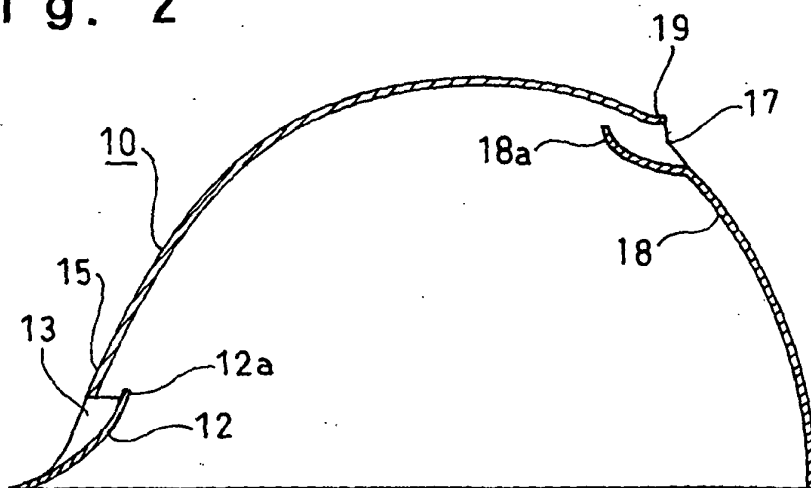


Fig. 3

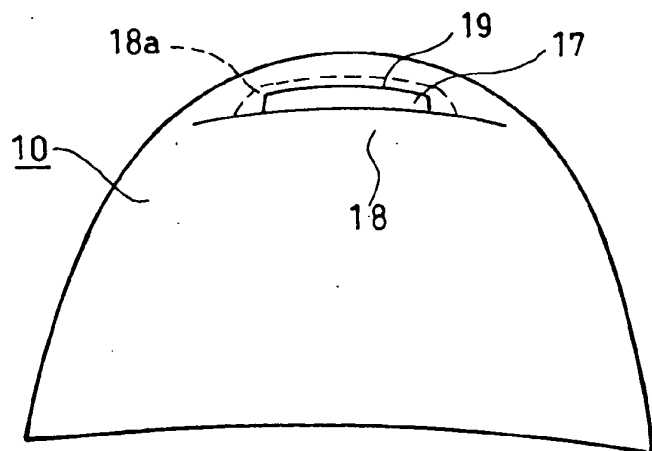


Fig. 4

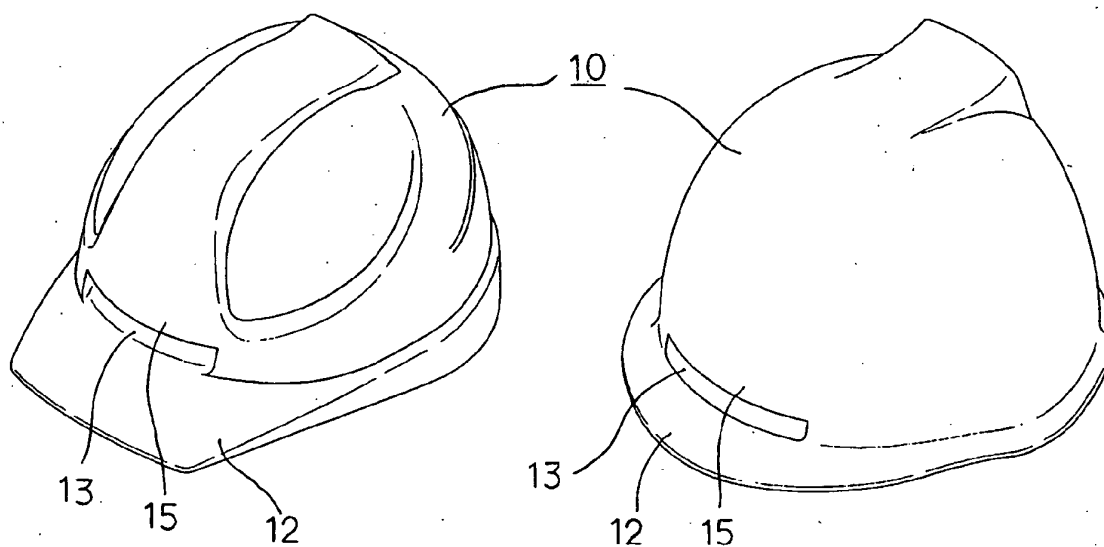


Fig. 5


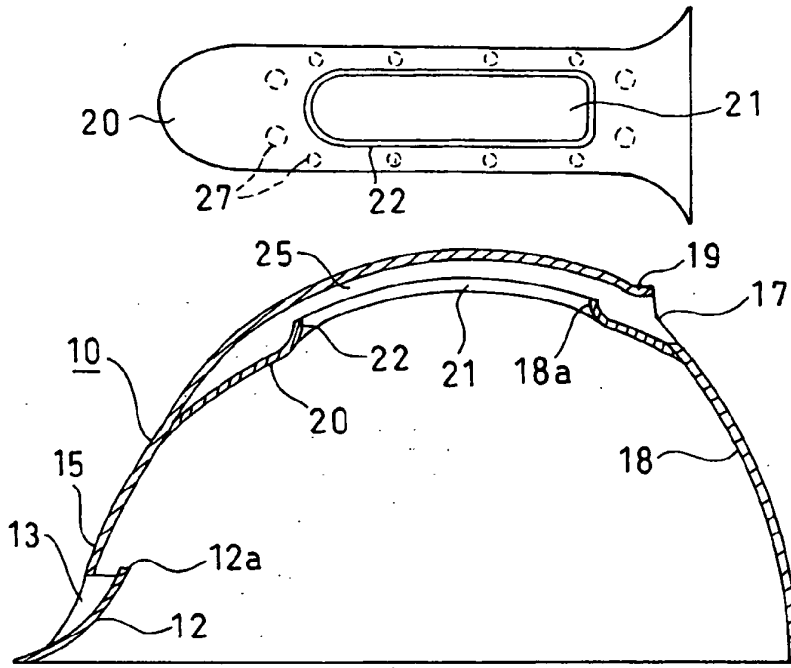


Fig. 6

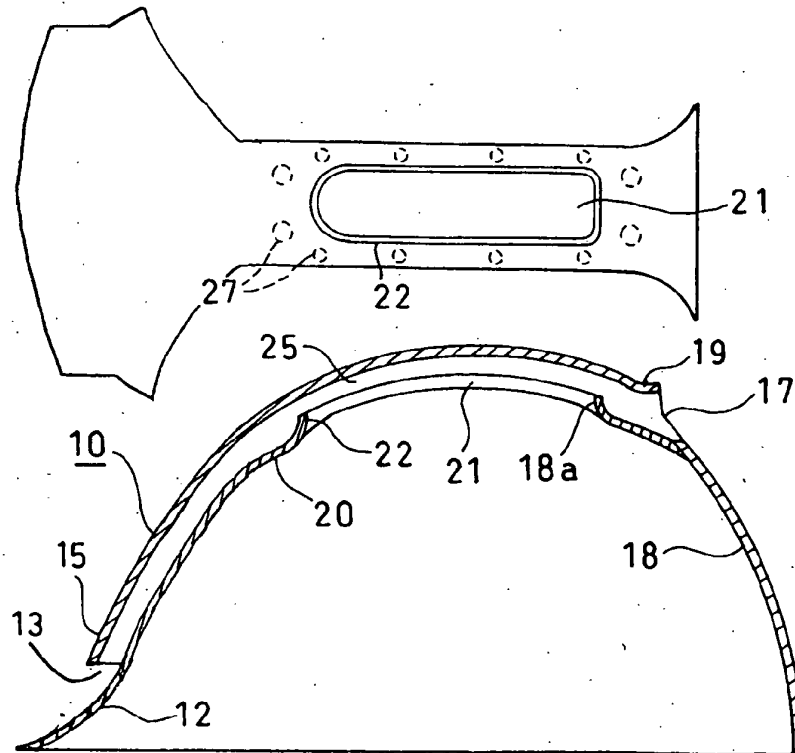

EP 1 649 770 B1

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 60143736 U [0003]
- JP 58007832 U [0003]
- JP 1094430 U [0003]
- JP 4220108 U [0003]
- WO 9528101 A [0004]
- WO 9823176 A [0004]
- JP 2000303246 A [0004]
- JP 2001003220 A [0005]