

(19)



(11)

EP 2 918 187 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
05.10.2016 Bulletin 2016/40

(51) Int Cl.:
A44B 11/22 ^(2006.01) **A44B 11/24** ^(2006.01)
A44C 5/20 ^(2006.01)

(21) Application number: **13853794.9**

(86) International application number:
PCT/JP2013/071435

(22) Date of filing: **07.08.2013**

(87) International publication number:
WO 2014/073250 (15.05.2014 Gazette 2014/20)

(54) **BUCKLE**

SCHNALLE

BOUCLE

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventor: **SHIRAI Syoji**
Tokyo 103-0025 (JP)

(30) Priority: **08.11.2012 JP 2012245987**

(74) Representative: **Heine, Christian Klaus**
KNH Patentanwälte Kahlhöfer Neumann
Röbler Heine PartG mbB
Postfach 10 33 63
40024 Düsseldorf (DE)

(43) Date of publication of application:
16.09.2015 Bulletin 2015/38

(73) Proprietor: **Builmatel Co., Ltd.**
Tokyo 103-0025 (JP)

(56) References cited:
JP-A- 2000 135 103 JP-A- 2010 220 795
JP-B1- 5 049 399 US-A1- 2010 281 661

EP 2 918 187 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present invention relates to a buckle for locking a band or belt having an engagement groove, and relates in particular to a buckle that is used together with a watch band, an armband or wristband for smart-phones or portable music players, or a band or belt of shoes or for shoes.

BACKGROUND ART

[0002] A buckle has been conventionally known, in which a band (or belt) is provided with an engagement groove; a hook of the buckle is elastically engaged with the groove; and such a locking state can be released at any time. In Japanese Patent No. 3982955, the present inventors have proposed a synthetic-resin buckle that is easy to manufacture and light in weight, the buckle including: a buckle main body composed of a base plate and a roof frame opposed to each other, and two side plates connecting the base plate and the roof frame, in which an inside of the buckle main body is an insertion space for the band having an engagement groove; and an operation piece being horizontally installed inside the roof frame, and having, on an under surface of one end thereof, the engagement claw that can be engaged with the engagement groove of the band, in which an other end thereof is a pressing portion; the operation piece is connected to two sides of the opposed roof frame in an intermediate point between the engagement claw and the pressing portion, whereby allowing the operation piece to swing around the intermediate point as a fulcrum; and an outer surface of the band and the roof frame are provided with a pair of latching protrusions, with which the band can be pulled toward the buckle main body with a finger-tip of one hand.

[0003] The synthetic-resin buckle is significantly superior in function, and is optimal as a buckle for headbands of a helmet. However, if the connecting shaft is thinned to be applied to a product such as a watch band that relatively requires the buckle to be downsized, a strong force acts on the band in a direction of separating from the buckle when the band and the buckle are locked, and the synthetic-resin connecting shaft might be damaged. There was also a problem that the engagement strength of the band and the buckle deteriorates due to degradation of the elasticity over time, which is attributable to a creeping phenomenon (i.e. a property of synthetic resin to slowly deform when a strong pressure is applied to the synthetic resin for a long time).

[0004] In Japanese Patent No. 4005109, the present inventors have also proposed a slide adjuster of a band and a buckle, which is suitably applied to products such as clothing ornaments in particular, the slide adjuster being light in weight and simple in configuration, in which the buckle portion has an inconspicuous external appear-

ance; an engagement claw is engaged with a serrate engagement groove formed on an outer surface of a band, whereby allowing the band to approach but not to retreat relatively to the buckle in the locking state; the buckle includes: a buckle main body composed of a base plate and a roof frame opposed to each other, and two side plates connecting the base plate and the roof frame, in which an inside of the buckle main body is an insertion space for the band; and an operation plate being horizontally installed inside the roof frame, and having, on an under surface of one end thereof, the engagement claw that can be engaged with the engagement groove of the band, in which an other end thereof is a pressing portion for releasing the engagement; the operation plate is movably supported by a connecting shaft connecting the two side plates in an intermediate point between the locking claw and the pressing portion, whereby allowing the operation plate to swing around the intermediate point as a fulcrum; and an outer surface of the band and the pressing portion are provided with a pair of latching portions, with which the buckle and the band can be pulled toward each other with a finger-tip of one hand.

[0005] This slide adjuster can improve the strength of the connecting shaft by using a hard material such as metal or resin having no elasticity. However, in this case, it is necessary to provide separate parts such as a coiled spring. When such separate parts are provided, the structure of the buckle is complicated, and it has been difficult to manufacture a buckle that is light in weight, small in size, and easy to manufacture. With the synthetic-resin buckle and the slide adjuster, the buckle and the band can be pulled toward each other with a finger-tip of one hand. However, in order to withdraw the band from the buckle, it is necessary to withdraw the band with one hand, while pressing the pressing portion of the buckle with the other hand. Therefore, this was not suitable as a buckle to be used for a watch band, etc., which require the band to be withdrawn with one hand.

[0006] Furthermore, JP 5 049399 B1 discloses a buckle having a connecting shaft made from a material showing elastic properties.

DISCLOSURE OF THE INVENTION

45 Problems to be Solved by the Invention

[0007] An object of the present invention is to provide a buckle that is light in weight, small in size, and easy to manufacture, in which the engagement strength of the band and the buckle does not deteriorate over time.

Means for Solving the Problems

[0008] The buckle of the present invention is a buckle, of which engagement claw can be engaged with a serrate engagement groove formed on an outer surface of a band, the buckle including: a buckle main body composed of a base plate and a roof frame opposed to each

other, and two side plates connecting the base plate and the roof frame, in which an inside of the buckle main body is an insertion space for the band; and an operation piece being horizontally installed inside the roof frame, and having, on an under surface of one end thereof, the engagement claw that can be engaged with the engagement groove of the band, in which an other end thereof is a pressing portion for releasing the engagement, in which the operation piece is movably supported by a connecting shaft connecting the two side plates in an intermediate point, whereby allowing the operation piece to swing around the intermediate point as a fulcrum; the buckle main body is provided with a control piece for controlling a swing of the operation piece; and the engagement claw is engaged with the engagement groove of the band, and in such a locked state, when the band enters the insertion space of the buckle, a top face of the band comes in contact with the engagement claw of the operation piece, and advances while pushing up the one end of the operation piece, and the operation piece returns to an initial position by recoil by touching the control piece, whereby allowing the band to advance but not to retreat, relatively to the buckle.

[0009] It is preferable that the control piece can be horizontally moved along an upper portion of the operation piece; and that the engagement can be released by moving the control piece. It is preferable that the engagement is released in a state where the control piece is moved to the other end side of the operation piece.

[0010] It is preferable that the control piece functions as a spring utilizing recoil when the operation piece swings to touch the control piece.

[0011] It is preferable that the buckle main body is provided with a latching portion, with which the buckle and the band can be pulled toward each other with a fingertip of one hand.

Effects of the Invention

[0012] In the buckle of the present invention, the control piece functions as a spring for controlling the swing of the operation piece in the locking state of the band and the buckle; therefore, it is possible to provide a buckle that is light in weight, small in size, and easy to manufacture, without providing separate parts such as a coiled spring, in which the engagement strength of the band and the buckle does not deteriorate over time. Therefore, the present buckle is optimal for application to a product such as a watch band, which relatively requires a buckle to be downsized. Furthermore, the band can be withdrawn with one hand, by using the buckle in which the control piece can be horizontally moved.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013]

FIGS. 1A and 1B are perspective views of a buckle

10 of the present invention;

FIGS. 2A, 2B, 2C, and 2D are vertical cross-sectional side views of an essential part showing an engaged state of the buckle 10 and a band 30;

FIGS. 3A and 3B are perspective views showing another embodiment of the buckle 10; and

FIGS. 4A and 4B are vertical cross-sectional side views of an essential part showing an engaged state of the buckle 10 and the band 30 shown in FIG. 3A.

EXPLANATION OF REFERENCE NUMERALS

[0014]

10	buckle
11	base plate
12	roof frame
13	side plate
14	buckle main body
16	insertion space
20	operation piece
20A	one end of operation piece
20B	other end of operation piece
21	engagement claw
22	pressing portion
25	connecting shaft
30	band
31	engagement groove
40	control piece

PREFERRED MODE FOR CARRYING OUT THE INVENTION

[0015] Embodiments of the buckle according to the present invention are hereinafter described with reference to the drawings. FIGS. 1A and 1B are perspective views of a buckle 10, in which FIG. 1A shows a state where an operation piece 20 and a control piece 40, which configure the buckle 10, are separated above from a buckle main body 14; and FIG. 1B shows a state where the operation piece 20 and the control piece 40 are installed in the buckle main body 14. In these drawings, the buckle 10 is mainly composed of: a base plate 11; a roof frame 12 opposed thereto; and the flat and cylindrical buckle main body 14 composed of side plates 13 and 13 that connect the base plate 11 with the roof frame 12. Insertion holes 15 and 15 of the buckle main body 14 are opened in a direction of sliding a band; and an inside thereof is an insertion space 16 for a band 30 having an engagement groove (to be described later).

[0016] In the present embodiment, the length of the base plate 11 in the longitudinal direction (the direction of sliding the band) is longer than the length of the roof frame 12 in the longitudinal direction, thereby facilitating the attachment of the buckle 10 to a connected body (i.e. a watch band, etc.), and allowing the band to be smoothly inserted. A similar effect can also be achieved by: configuring the roof frame 12 with a flat plate; and horizon-

tality extending the roof frame 12, which is opposite to one end 20A of the operation piece 20, in a direction opposite to the operation piece 20.

[0017] The operation piece 20 having a dimension to fit inside the roof frame 12 is horizontally installed inside the roof frame 12. An under surface of the one end 20A of the operation piece 20 is provided with a projected engagement claw 21 that can be engaged with the engagement groove of the band 30; and an other end 20B of the operation piece 20 serves as a pressing portion 22 for releasing the engagement. The operation piece 20 is slightly lower in position than the roof frame 12, thereby making it possible to prevent the one end 20A or the other end 20B of the operation piece 20 from being accidentally pushed down.

[0018] A connecting shaft 25 is formed in an intermediate portion of the operation piece 20 in the longitudinal direction; and the connecting shaft 25 is movably supported by each upper inner wall of the side plates 13 and 13. As a result, the operation piece 20 can swing around the intermediate portion as a fulcrum. A cross section of the connecting shaft 25 is circular in the present embodiment, but can have elliptical or any other various cross-sectional shapes. The connecting shaft 25 is desired to be as thin as possible so as to swingably and pivotally support the operation piece 20 and secure smooth operability, and may have a shape and dimension that do not cause any damage due to repeated swings.

[0019] In the present invention, a material used for the connecting shaft is not limited in particular, and synthetic resin having elasticity may be used, or a hard material such as metal or resin having no elasticity may be used as well. In a case of using such a hard material, the strength of the connecting shaft per se is increased; therefore, the engagement strength of the band 30 and the buckle 10 is improved.

[0020] Inside the buckle main body 14, the control piece 40 is installed in a position above the operation piece 20. A shape of the control piece 40 is not limited in particular, as long as the shape achieves the function of controlling the swinging of the operation piece 20 (as described later).

[0021] Next, functions of the buckle 10 are described with reference to FIG. 2A and 2B. FIG. 2A is a vertical cross-sectional side view of an essential part showing an engaged state of the buckle 10 and the band 30. In FIG. 2A, the band 30 is inserted into the insertion space 16 of the buckle 10; and the engagement claw 21 of the buckle 10 is engaged with the engagement groove 31 formed on an outer surface of the band 30. A cross-sectional shape of the engagement groove 31 is serrate in the sliding direction; namely, the engagement groove 31 is composed of: a tapered surface that is gradually deepened in the traveling direction of the band 30; and a wall surface that substantially perpendicularly rises from the deepest position.

[0022] When the band 30 enters the insertion space 16 from the insertion hole 15 on the other end 20B side

of the operation piece 20 (the left side in FIG. 2A), a top face of the band 30 comes in contact with the engagement claw 21 of the operation piece 20, and advances while pushing up the one end 20A of the operation piece 20 (see FIG. 2B); the operation piece 20 returns to the initial position by recoil by touching the control piece 40; and the approach/separation position of the band 30 relative to the buckle 10 is adjusted (see FIG. 2C). In other words, the control piece 40 functions as a spring for biasing the operation piece 20 toward the engagement groove 31 side of the band 30; therefore, in this state, the engagement claw 21 is locked while being engaged with a predetermined engagement groove 31, and the band 30 can advance but cannot retreat, relatively to the buckle 10.

[0023] The present invention does not utilize elasticity of the connecting shaft 25 per se; therefore, by using a material such as metal or resin having no elasticity for the connecting shaft 25, even if the connecting shaft 25 is thinned to downsize the buckle, the connecting shaft 25 is not likely to be damaged when a strong force acts in a direction of separating the band 30 from the buckle 10. The engagement strength is not likely to deteriorate, either, due to degradation of the elasticity of the connecting shaft 25 over time, which is attributable to a creeping phenomenon (i.e. a property of synthetic resin to slowly deform when a strong pressure is applied to the synthetic resin for a long time). Since the control piece 40 functions as a spring, it is not necessary to provide a coiled spring as a separate part, the parts count can be minimized, and the structure of the buckle 10 can be simplified.

[0024] Next, when the band 30 is retreated or withdrawn from the buckle 10, the pressing portion 22 is pressed to rotate the operation piece 20 around the connecting shaft 25 as shown in FIG. 2D; as a result, the engagement claw 21 positioned on the opposite side is lifted; and the engagement claw 21 is disengaged from the engagement groove 31; therefore, the band 30 can be freely slid. By separating a finger from the pressing portion 22, the operation piece 20 in contact with the control piece 40 returns to the initial state by its recoil.

[0025] Next, another embodiment of the buckle 10 is described with reference to FIGS. 3A and 4A. FIG. 3A is a perspective view of the buckle 10; and FIG. 4A is a vertical cross-sectional side view of an essential part showing an engaged state of the buckle 10 and the band 30. However, the same reference numerals are assigned to the same members as described in the aforementioned embodiment, and descriptions thereof are omitted.

[0026] In the present embodiment, the control piece 40 is horizontally slid and moved along an upper portion of the operation piece 20, which is a point of difference from the embodiment described above. A surface of the control piece 40 is provided with a slide operation unit 42 as a concave portion. A shape of the slide operation unit 42 is not limited in particular, as long as a finger-tip of one hand can be hooked on the shape. The slide oper-

ation unit 42 does not necessarily have to be provided to the control piece 40, but such provision can facilitate the slide operation of the control piece 40.

[0027] The two side plates 13 and 13 of the buckle 10 are provided with slide guides 17 and 17, respectively, for guiding the movement of the control piece 40. FIGS. 3A and 3B are perspective views showing a state where the control piece 40 is moved along the slide guides 17 and 17. In the present embodiment, the slide guides 17 and 17 are formed as grooves on the side plates 13 and 13 of the buckle 10; however, the position and shape of the slide guide 17 is not limited in particular, as long as the smooth movement of the control piece 40 can be guided.

[0028] By sliding the control piece 40 along the slide guides 17 and 17 toward the other end 20B side of the operation piece 20 as shown in FIG. 3B, the operation piece 20 is rotated around the connecting shaft 25 as shown in FIG. 4B; as a result, the engagement claw 21 positioned on the opposite side is lifted; and the engagement claw 21 is disengaged from the engagement groove 31; therefore, the band 30 can be freely slid. By returning the control piece 40 to the original position along the slide guides 17 and 17, the operation piece 20 returns to the original horizontal state (see FIG. 4A.)

[0029] According to the present embodiment, the band 10 can be freely withdrawn from the buckle 20 with one hand, by sliding the control piece 40 toward the other end 20B side of the operation piece 20. Therefore, the buckle is optimal as a buckle used for a watch band, etc. that require a one-handed operation.

[0030] Although not illustrated, in the buckle 10 of the present invention, the buckle main body 14 can be provided with a latching portion, with which the band 30 and the buckle 10 can be pulled toward each other with one hand. The latching portion does not necessarily have to be provided, but such provision facilitates the operation of pulling the band 30 and the buckle 10 toward each other with one hand. Therefore, by providing the latching portion to the aforementioned buckle 10, in which the control piece 40 can be horizontally moved, all the operations including the pulling of the band 30 and the buckle 10 toward each other, as well as the withdrawing of the band 30, can be easily performed with one hand.

[0031] In the present invention, the roof frame 12 is not necessarily limited to the one including four sides. One side opposite to the one end 20A of the operation piece 20 can be omitted, in a case of reducing the weight and/or size of the buckle.

[0032] The buckle 10 of the present invention can incorporate elements disclosed in Patent Documents 1 and 2 described above. For example, in order to make it easy to restore the operation piece 20 to the horizontal state, a joint member may be provided, which connects the one end 20A of the operation piece 20 with the opposing roof frame 12, etc. Furthermore, the insertion space 16 can be provided with a band suppressor (not illustrated) for preventing the band 30 from uplifting.

Claims

1. A buckle (10), of which engagement claw (21) can be engaged with a serrate engagement groove (31) formed on an outer surface of a band (30), the buckle (10) comprising:

a buckle main body (14) composed of a base plate (11) and a roof frame (12) opposed to each other, and two side plates (13) connecting the base plate (11) and the roof frame (12), wherein an inside of the buckle main body (14) is an insertion space (16) for the band (30); and an operation piece (20) being horizontally installed inside the roof frame (12), and having, on an under surface of one end thereof, the engagement claw (21) that can be engaged with the engagement groove (31) of the band (30), wherein an other end thereof is a pressing portion (22) for releasing the engagement, wherein the operation piece (20) is movably supported by a connecting shaft (25) connecting the two side plates (13) in an intermediate point, whereby allowing the operation piece (20) to swing around the intermediate point as a fulcrum, wherein the buckle main body (14) is provided with a control piece (40) for controlling a swing of the operation piece (20), and wherein the engagement claw (21) is engaged with the engagement groove (31) of the band (30), and in such a locked state, when the band (30) enters the insertion space (16) of the buckle (10), a top face of the band (30) comes in contact with the engagement claw (21) of the operation piece (20), **characterized in that** the band (30) advances while pushing up the one end of the operation piece (20), and the operation piece (20) returns to an initial position by recoil by touching the control piece (40), whereby allowing the band (30) to advance but not to retreat, relatively to the buckle (10).

2. The buckle (10) according to claim 1, wherein the control piece (40) can be horizontally moved along an upper portion of the operation piece (20), and wherein the engagement can be released by moving the control piece (40).
3. The buckle (10) according to claim 2, wherein the engagement is released in a state where the control piece (40) is moved to the other end side of the operation piece (20).
4. The buckle (10) according to claim 1,

wherein the buckle main body (14) is provided with a latching portion, with which the buckle (10) and the band (30) can be pulled toward each other with a finger-tip of one hand.

Patentansprüche

1. Eine Schnalle (10), deren Eingriffsklaue (21) in eine Eingriffszackenkerbe (31), die auf der Außenfläche eines Bandes (30) gebildet ist, eingreifen kann, wobei die Schnalle (10) umfasst:

einen Schnallenhauptkörper (14) gebildet aus einer Grundplatte (11) und einem Dachrahmen (12), die sich gegenüberliegen, und zwei Seitenplatten (13), die die Grundplatte (11) und den Dachrahmen (12) verbinden, wobei eine Inneres des Schnallenhauptkörpers (14) einen Einführungsraum (16) für das Band (30) darstellt; und

ein Betätigungsteil (20), das waagrecht in den Dachrahmen (12) eingebaut ist, und das an einer Unterseite eines seiner Enden die Eingriffsklaue (21) aufweist, die in die Eingriffszackenkerbe (31) des Bandes (30) eingreifen kann, wobei ein anderes seiner Enden ein Drückteil (22) zum Lösen des Eingriffs darstellt,

wobei das Betätigungsteil (20) beweglich auf einem Verbindungsschaft (25) gelagert ist, der die zwei Seitenplatten (13) in einem Zwischenpunkt verbindet, wodurch sich das Betätigungsteil (20) um den Zwischenpunkt als Drehpunkt drehen kann,

wobei der Schnallenhauptkörper (14) ein Regelteil (40) zum Regeln einer Drehung des Betätigungsteils (20) aufweist, und

wobei die Eingriffsklaue (21) in die Eingriffskerbe (31) des Bandes (30) eingreift und eine Oberseite des Bandes (30) die Eingriffsklaue (21) des Betätigungsteils (20) berührt, wenn das Band (30) in diesem arretierten Zustand in den Einführungsraum (16) der Schnalle (10) eintritt, **dadurch gekennzeichnet, dass** sich das Band (30) vorschiebt, während es das eine Ende des Betätigungsteils (20) nach oben drückt, und das Betätigungsteil (20) durch Zurückschnellen in eine Ausgangsposition zurückkehrt, wenn das Regelteil (40) berührt wird, wodurch sich das Band (30) in Bezug auf die Schnalle (10) nach vorne, jedoch nicht zurückschieben kann.

2. Schnalle (10) nach Anspruch 1,

wobei das Regelteil (40) waagrecht entlang eines oberen Teils des Betätigungsteils (20) bewegt werden kann, und

wobei der Eingriff durch Bewegungen des Re-

gelteils (40) gelöst werden kann.

3. Schnalle (10) nach Anspruch 2,

wobei der Eingriff in einem Zustand gelöst wird, in dem das Regelteil (40) zur Seite am anderen Ende des Betätigungsteils (20) bewegt ist.

4. Schnalle (10) nach Anspruch 1,

wobei der Schnallenhauptkörper (14) mit einem Verriegelungsteil versehen ist, mit dem die Schnalle (10) und das Band (30) mit der Fingerspitze einer Hand zueinander gezogen werden können.

Revendications

1. Boucle (10) dont la griffe d'engagement (21) peut être engagée dans une fente d'engagement dentelée (31) formée sur une surface externe d'une bande (30), la boucle (10) comprenant :

un corps principal de boucle (14) composé d'une plaque de base (11) et d'une charpente (12) opposées l'une à l'autre, et deux plaques latérales (13) raccordant la plaque de base (11) et la charpente (12), l'intérieur du corps principal de la boucle (14) étant un espace d'insertion (16) pour la bande (30) ; et

une pièce d'utilisation (20) installée horizontalement à l'intérieur de la charpente (12) et ayant, sur une surface inférieure d'une de ses extrémités, la griffe d'engagement (21) qui peut être engagée dans la fente d'engagement (31) de la bande (30), son autre extrémité étant une portion de pression (22) permettant de libérer l'engagement,

la pièce d'utilisation (20) étant soutenue lors de son mouvement par un arbre de raccordement (25) raccordant les deux plaques latérales (13) en un point intermédiaire, ce qui permet à la pièce d'utilisation (20) de pivoter autour du point intermédiaire servant de pivot,

le corps principal de boucle (14) étant doté d'une pièce de contrôle (40) servant à contrôler un pivotement de la pièce d'utilisation (20), et la griffe d'engagement (21) étant engagée dans la fente d'engagement (31) de la bande (30), et dans un tel état verrouillé, quand la bande (30) entre dans l'espace d'insertion (16) de la boucle (10), la face supérieure de la bande (30) entrant en contact avec la griffe d'engagement (21) de la pièce d'utilisation (20),

caractérisée en ce que la bande (30) avance quand on pousse vers le haut une extrémité de la pièce

d'utilisation (20), et la pièce d'utilisation (20) retourne à une position initiale par recul au contact de la pièce de contrôle (40), ce qui permet à la bande (30) d'avancer mais de ne pas reculer par rapport à la boucle (10).

5

2. Boucle (10) selon la revendication 1, dans laquelle la pièce de contrôle (40) peut être déplacée horizontalement le long d'une portion supérieure de la pièce d'utilisation (20), et dans laquelle l'engagement peut être libéré par déplacement de la pièce de contrôle (40). 10
3. Boucle (10) selon la revendication 2, dans laquelle l'engagement est libéré dans un état où la pièce de contrôle (40) est déplacée de l'autre côté de la pièce d'utilisation (20). 15
4. Boucle (10) selon la revendication 1, dans laquelle le corps principal de boucle (14) est dotée d'une portion d'enclenchement avec laquelle la boucle (10) et la bande (30) peuvent être tirées l'une vers l'autre sous l'action d'un bout de doigt d'une main. 20

25

30

35

40

45

50

55

FIG. 1A

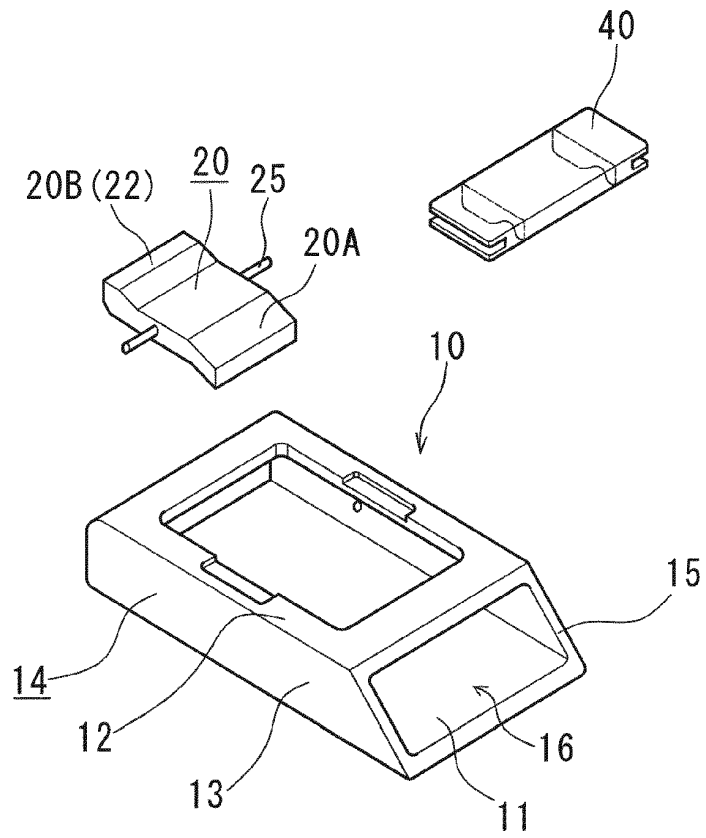


FIG. 1B

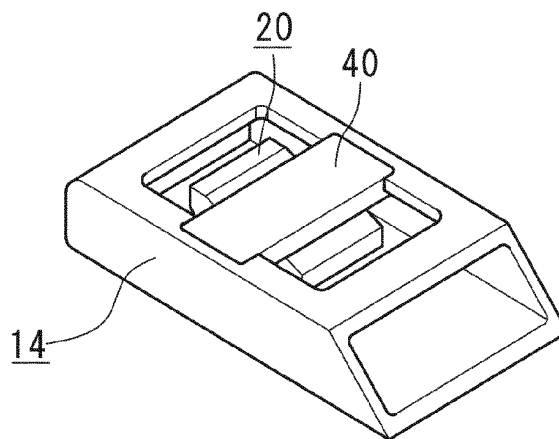


FIG. 2A

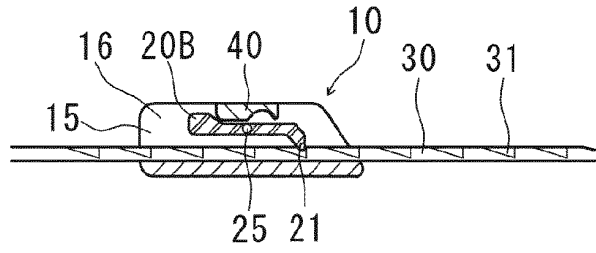


FIG. 2B

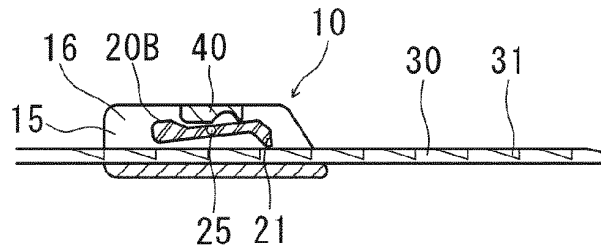


FIG. 2C

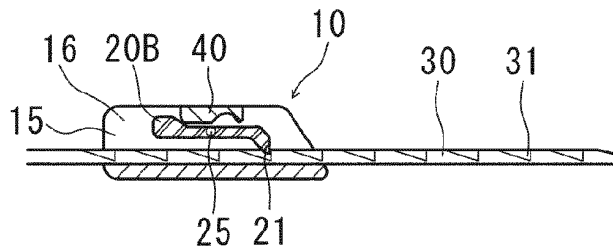


FIG. 2D

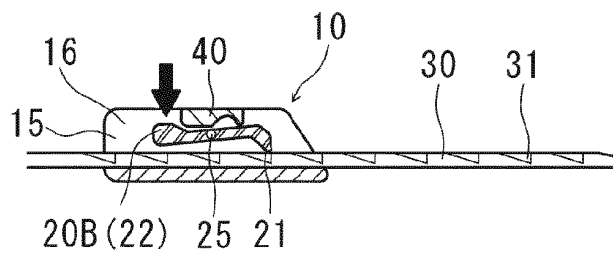


FIG. 3A

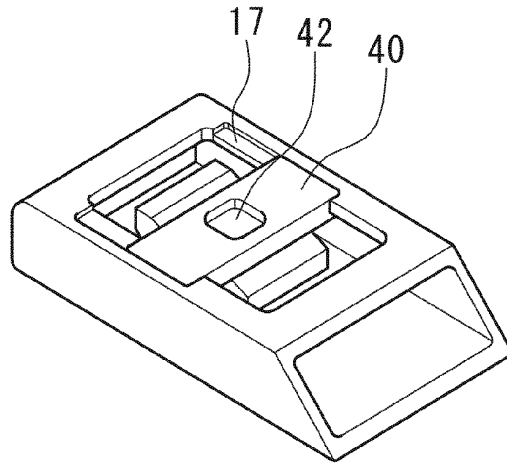


FIG. 3B

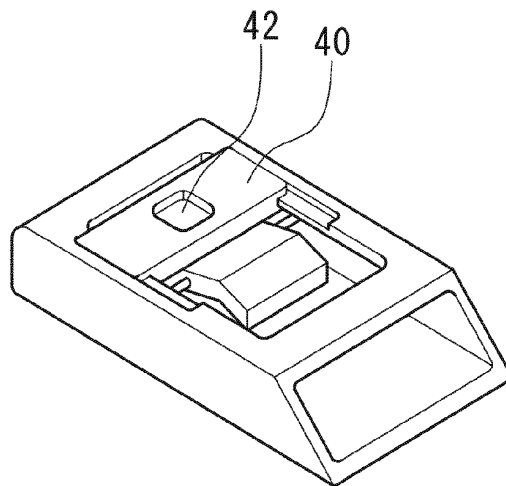


FIG. 4A


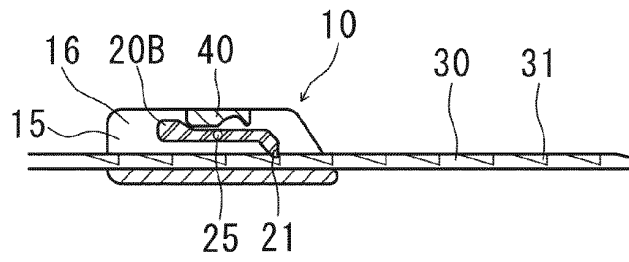


FIG. 4B

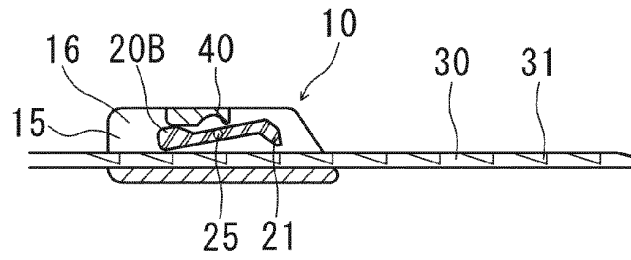

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 3982955 B [0002]
- JP 4005109 B [0004]
- JP 5049399 B [0006]